

Lightning protection wire holders

Function:

For the simple and secure attachment of lightning protection lines on flat roofs

Material 1:

- Polyamide Gray
- Low-temperature impact resistant plastic, weatherproof, UV-stabilized
- Application temperature is between +50 °C and -10 °C

Available sizes:

For lightning protection lines 8 - 10 mm



Package units:

Supplied in cartons, PU 50 units

Accessories:

Metal blank for attachment to the roof sheeting:

- PVC
- FPO/PP¹
- BIT sandet²

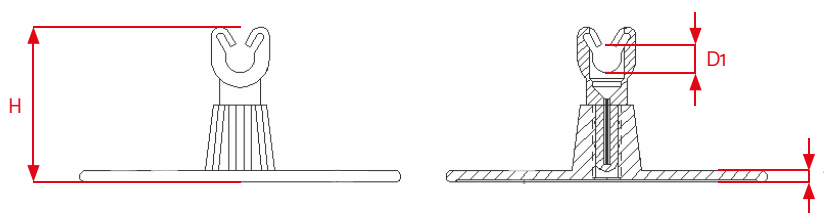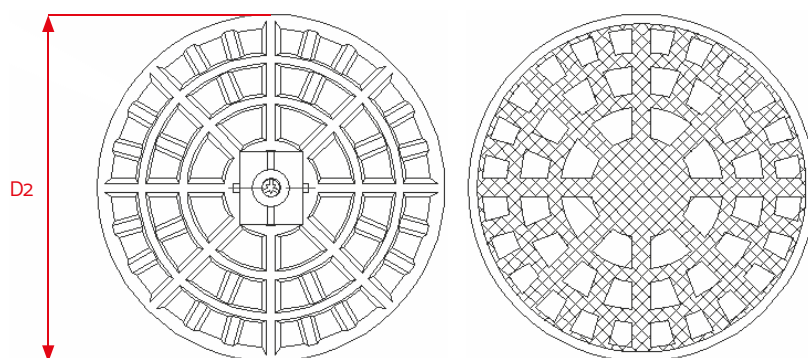

Technical data	
H	53 mm
D1	8 - 10 mm
D2	110 mm
t	3 mm

¹ Alternatively available in PE (roof membranes based on PE) (Rondell)

² Alternatively, also available as a custom-made version with slate

KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.